
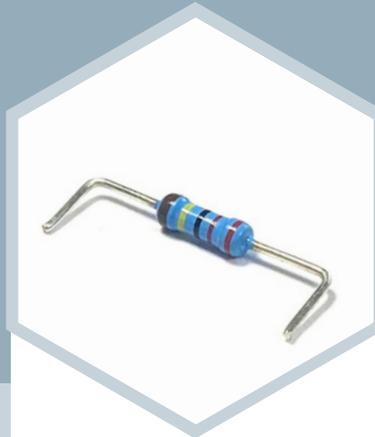
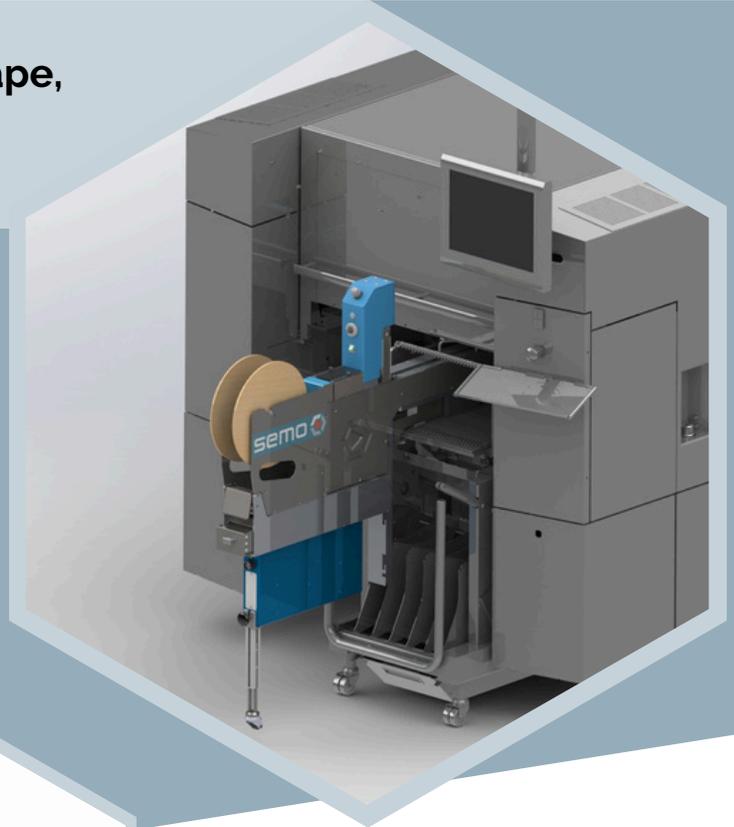


AF : for axial leaded components on tape,
packaged in ammo pack or reel

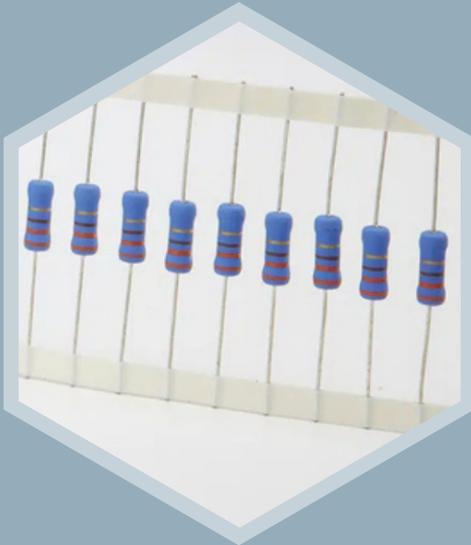

Width : 90 mm+

Length : 1213mm (718mm outside table)

Weight : 30 kg

Power supply : 110/240 Vac - 50/60 Hz

Air supply : 5 / 7 bar


GENERAL CONCEPT

- ▶ Very robust mechanics and tooling
- ▶ Guaranteed lead space with high repeatability of lead length and lead bending angle
- ▶ Empty tape management at the back of the feeder for highest cleanliness level
- ▶ Easy access for the loading of new components



ONLY WITH SEMO : optional kinked leads

Due to its original design SEMO is able to provide axial components not only cut to length and bent but also with kinked leads.

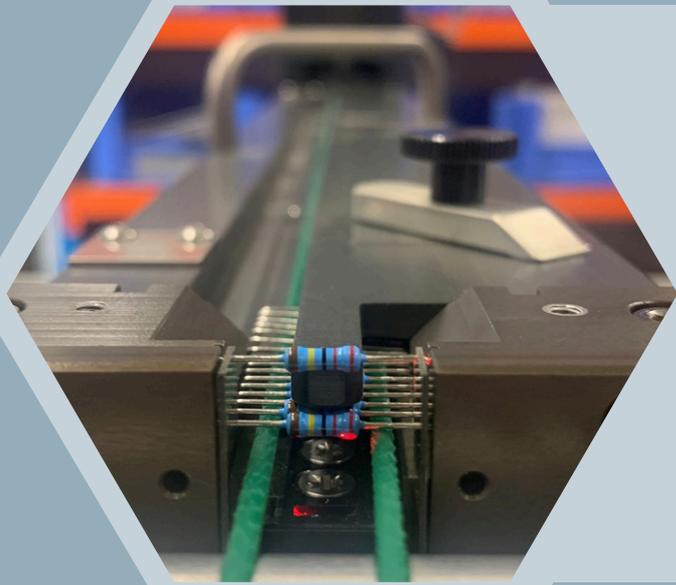

INTEGRATION FOR MULTIPLE MANUFACTURERS

- Possible integration with many pick-and-place machines
- SEMO feeders can communicate with pick-and-place machines or can function manually for tests and maintenance.


CHARACTERISTICS

- ▶ Lead Diameter : 0,4 to 1,4mm
- ▶ Compotent pitch : 5 to 20mm
- ▶ Tape width : 55-105mm
- ▶ Tape end detection
- ▶ Tape cutter outside pick and place machine
- ▶ Optional kinked leads
- ▶ Optional interlayer paper drawer
- ▶ A mobile crutch supports the feeder once in the pick-and-place machine
- ▶ Optional communication for optimal synchronisation with pick-and-place machine

SMARTFEEDER

Bluetooth communication with a mobile terminal =

- ▶ Settings at your fingertips
- ▶ Realtime access to documentation
- ▶ Easy and fast troubleshooting

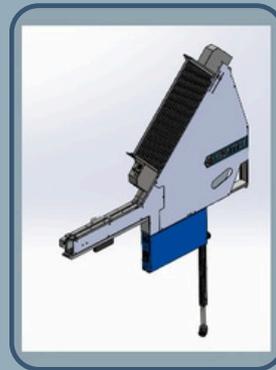

+33 5 61 85 55 77
semo@semo.fr
10 rue Louis Breguet,
31700 Cornebarrieu, FRANCE

