




SPECIALTUBE FEEDER

STF80

STF : for components packaged in sticks and needing cutting, bending or forming

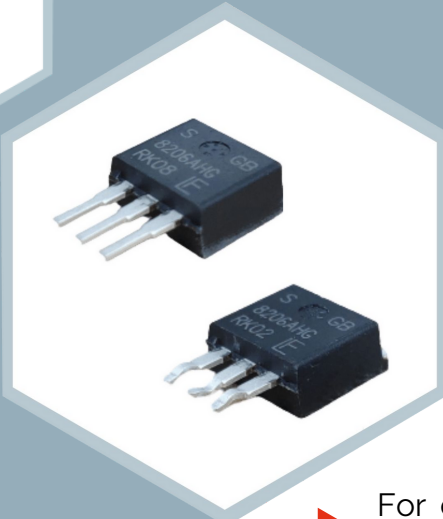

Width : 90 mm

Length : 1320 (810 outside table)

Weight : 27 kg

Power supply : 110/220 Vac - 50/60 Hz

Air supply : 5 / 7 bar

FEATURES

- ▶ For components packaged into plastic sticks and which pins need :
 - ▶ cutting
 - ▶ and / or bending
 - ▶ and / or forming
- ▶ Ability to perform up to three of these processes in the same feeder

BENEFITS


- ▶ Use of standard components from electronic supplier
- ▶ No need for additional off-line machine to preform
- ▶ Component traceability (managed by pick-and-place machine)
- ▶ All the benefits of the field proven SEMO tube feeder

DID YOU KNOW ?

What to do when your component is discontinued?

SEMO Feeders can be recycled

We can reconfigure to new components, test, upgrade and provide the new full warranty: **a new life for your feeder and some savings for you.**

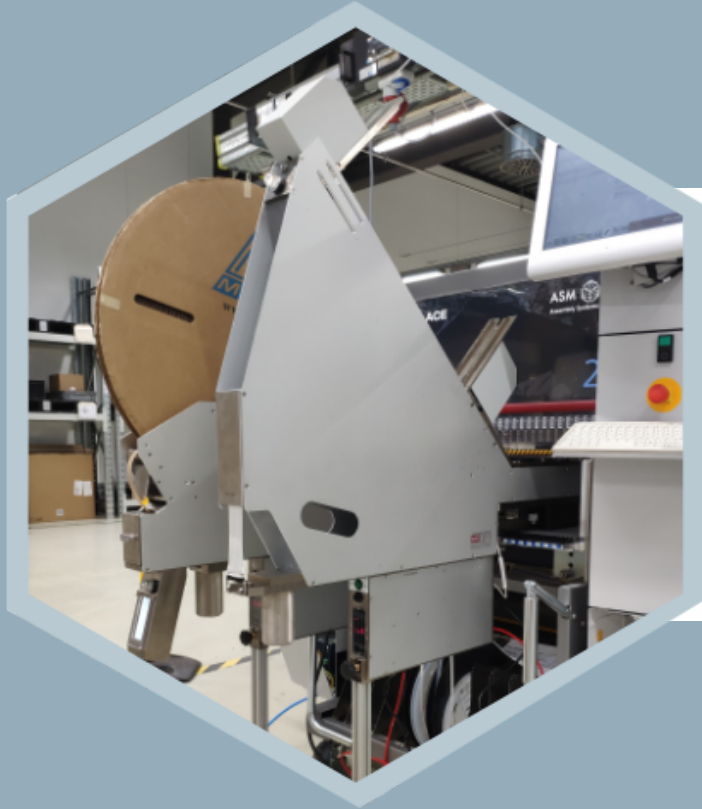

Integration with pick-and-place machines

- Possible integration with many pick-and-place machines
- Semo feeders can communicate with pick-and-place machines or can function manually for tests and maintenance.

CHARACTERISTICS

- ▶ **Automatic startup with cycle time** < 2s
- ▶ **Lengths of sticks** : 500 mm to 600 mm maximum
- ▶ **Gravity system** : sticks tilted to 45°
- ▶ **Number of sticks depends on the sticks height:**
storage stick height 250 mm
- ▶ **Stick replenishment without stopping production**
- ▶ **Repeatability of positionning** : < 0.1 mm
- ▶ **SEMO Tube Feeder can be mounted on a changeover table** every 80 mm
- ▶ **Optional communication for optimal synchronization**
with pick and place machine
- ▶ **A mobile crutch supports the feeders weight once**
mounted on a placement machine
- ▶ **Reconfigurable** if you need to convert your feeder to
another component

ACCESSORIES

▶ Trolley

- ▶ To handle feeders
- ▶ Electrical/Pneumatic connections plate
- ▶ Storage box with four drawers
- ▶ Additional storage interface

